



CABLE LENGTH SHOWN NOT TO SCALE

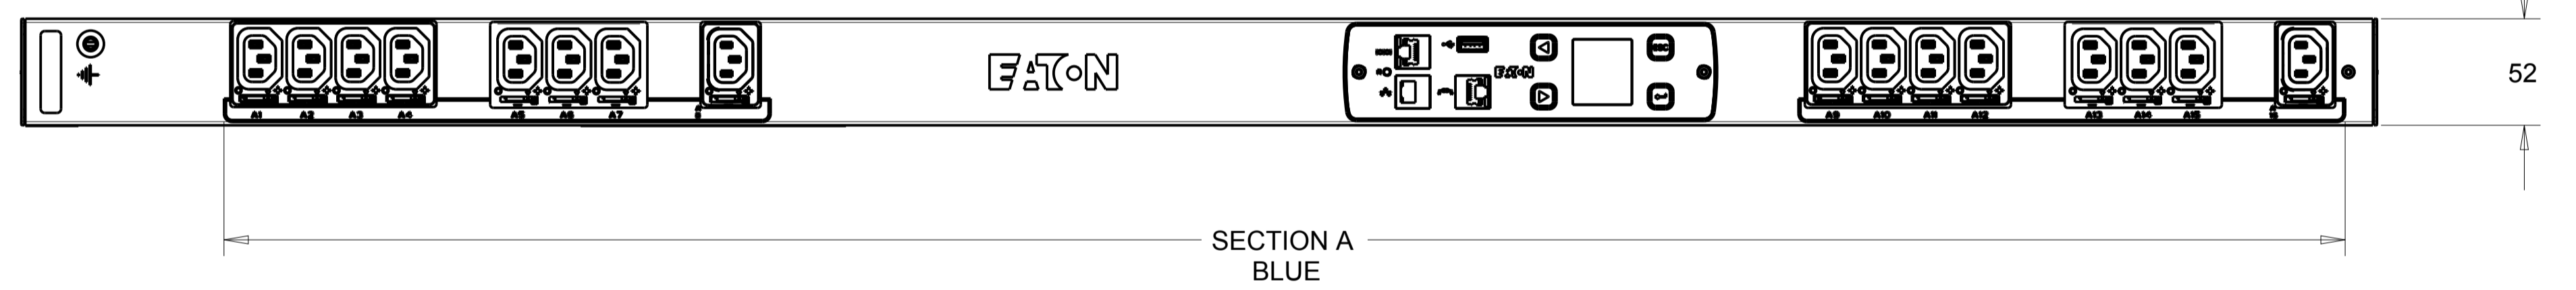


CIRCUIT SCHEMATIC

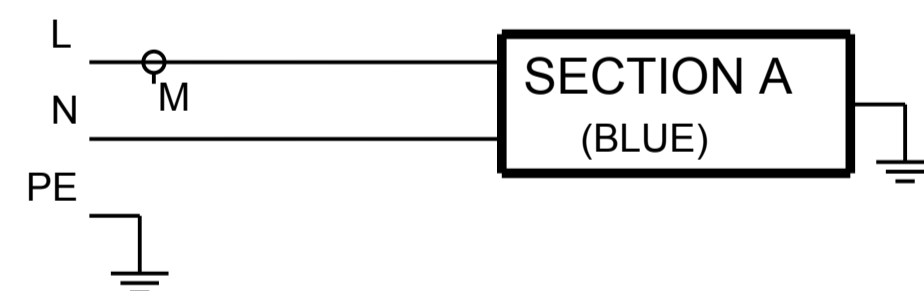

EMOB03 G3 METERED OUTLETS

FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT, BRANCH AND OUTLETS.	IEC 60309 C14 10A 230V~W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	(16) IEC 60320 C13 GRIP	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1150MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	1Ø; 200-240V~;W+N+PE 50/60HZ 10A	200-240V, 10A PER C13 10A MAX PER SECTION	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP015 - VERT INSTALL NETWORK PACK OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMO6CP7FABE76AM

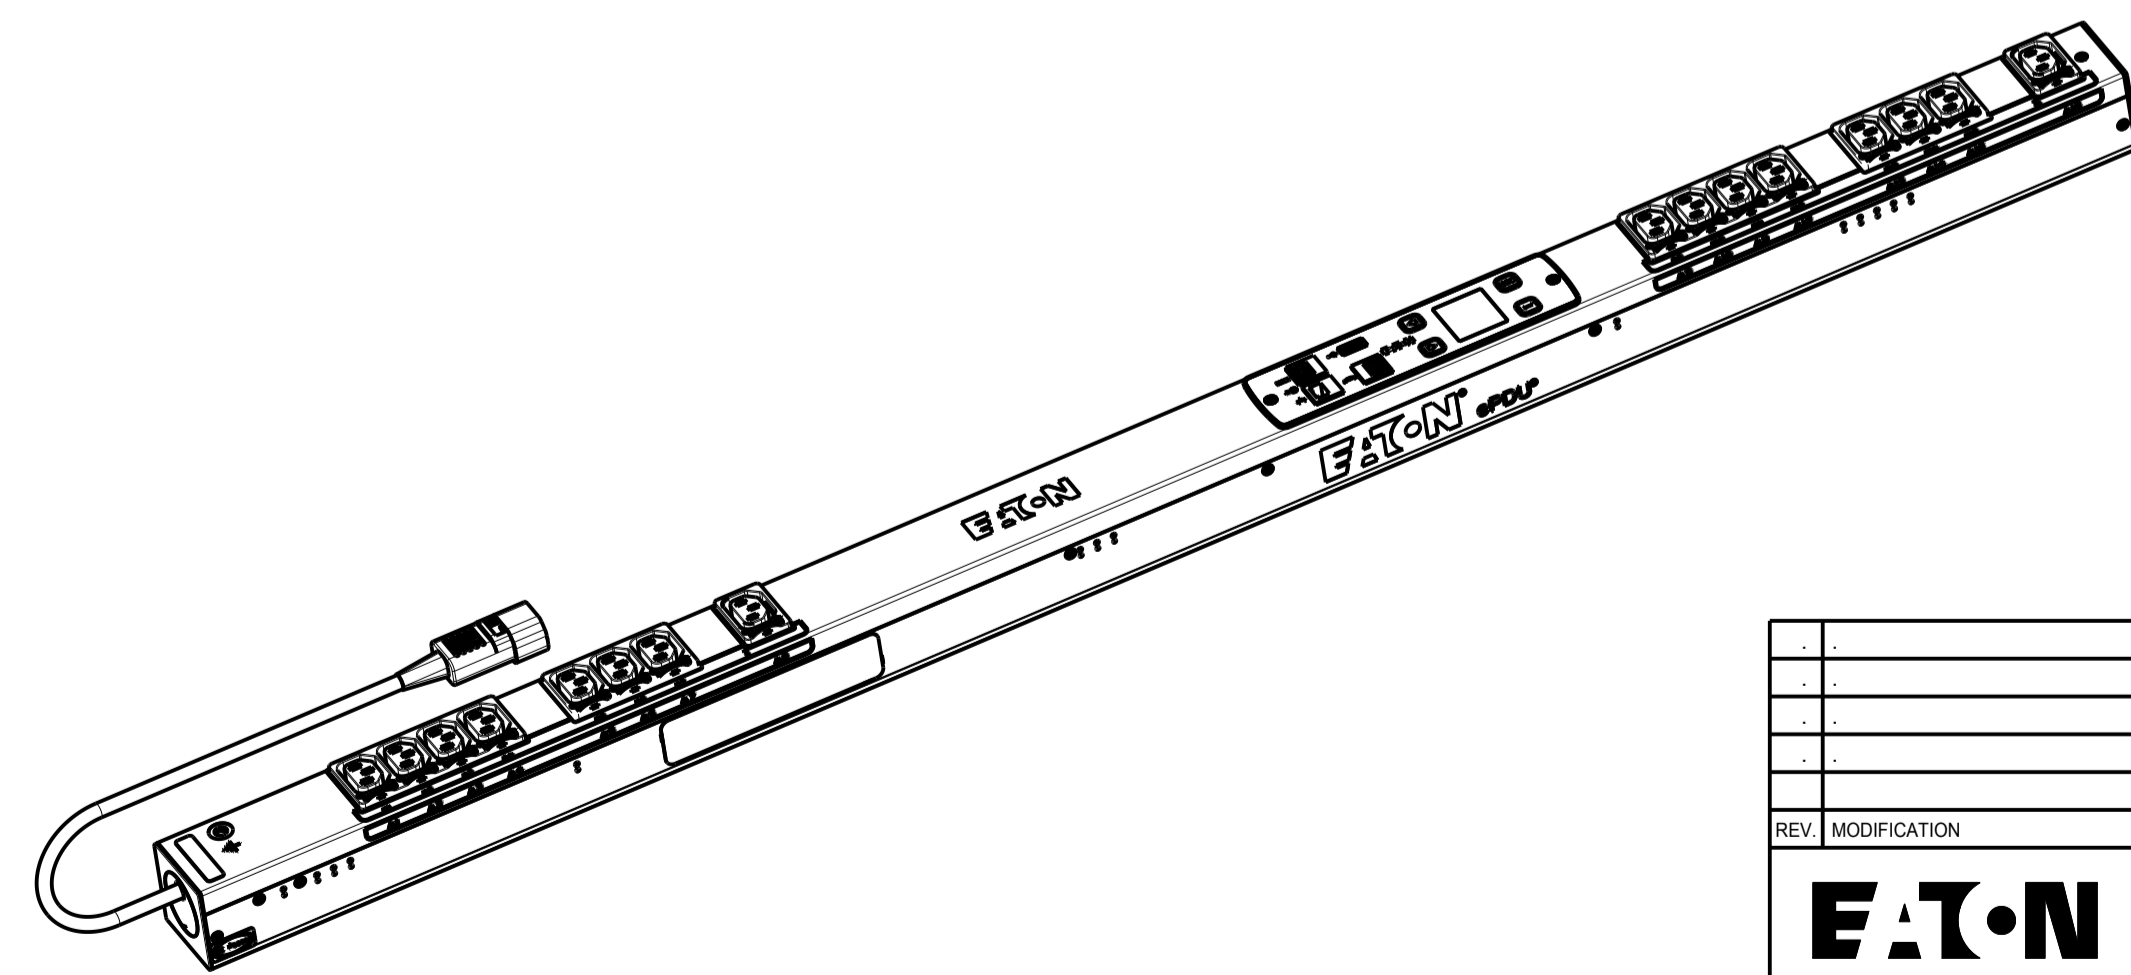

SCALE 0.250

REV	MODIFICATION	DATE	DESIGN	VERIF.
1				
		HEINEMANN PRODUCTS		VUE/VIEW EUROPE: 4/10 N° MAG: EMOB03
		CH-1345 LE LIEU SWITZERLAND		DESSINE LE / DRAWED THE: 04.12.2014 PAR / BY: G.McD.
TOLERANCE GENERALE / GENERAL TOLERANCE		VERIFIE PAR / VERIFIED BY: M.B.		
TRAITEMENT / FINISH: NA		NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT: X		DIMENSIONS AND TOLERANCES IN MILLIMETERS
MATIERE / MATERIAL: NA		DESIGNATION: EPDU MO DU (C14 10A 1P)16XC13		SK-48619-Y1 00
COTES A CONTROLER / INSPECTION DIMENSIONS: XX.XX		COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS: # XX.XX		NUMERO DU PLAN / PLAN NUMBER: REV.
<small>Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.</small>				